

# HOW TO REPLACE A HEPA FILTER IN AN XLERATOR DRYER

## 40520 HEPA FILTER REPLACEMENT INSTRUCTIONS

40520



**WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK, FIRE & PERSONAL INJURY, INSTALLATION MUST BE PERFORMED BY QUALIFIED ELECTRICAL SERVICE PERSONNEL. DISCONNECT POWER TO THE DRYER BEFORE INSTALLING THE FILTER.**

### TOOLS NEEDED

- Phillips Head Screwdriver (Not Included)
- Tamper-Proof Hex Wrench (Included)

1. Disconnect the power to the dryer.
2. Remove the cover of the dryer with the Tamperproof Hex Wrench provided.
3. Remove Pre-Filter from HEPA Filter and save for reuse. See **Figure 1**.
4. Remove and save **two (2) screws** securing HEPA Filter to blower housing and remove Filter as shown. See **Figures 1 and 3**.
5. Take the HEPA Filter out of the clear sealed plastic wrap (**Figure 2**) and insert the HEPA Filter into the HEPA Filter Adapter. **DO NOT push on the white filter media**. This can damage the filter media. The side with the foam gasket around the perimeter of the HEPA Filter should enter into the HEPA Filter Adapter first. Fasten the HEPA Filter to the HEPA Filter Adapter with the **two (2) screws** which were removed and saved in Step 4. See **Figures 1 and 3**.
6. Snap the Pre-Filter into place. Do this by simply pushing the Pre-Filter over the HEPA Filter so that the Pre-Filter clips snap into the square cutout on each side of the Pre-Filter. The installation is now complete. Reinstall the cover to the hand dryer and restore power.

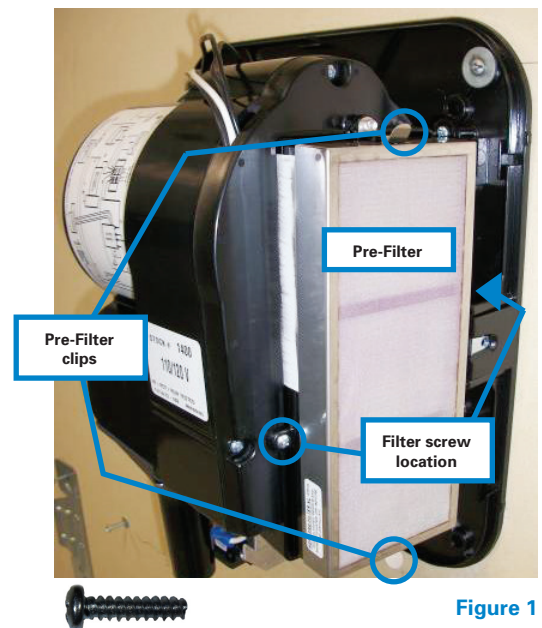


Figure 1

Remove HEPA filter from sealed plastic bag before installing

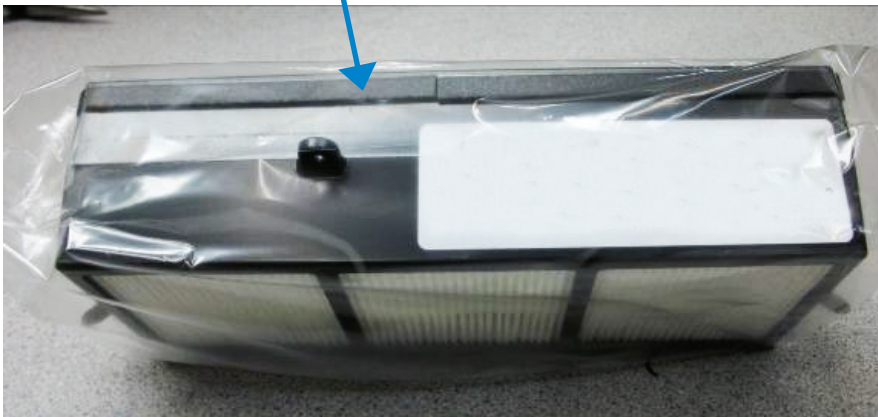


Figure 2



Figure 3

1. This product is warranted to be free from manufacturing defects only for a period of one year from the date of shipment from the Manufacturer's factory at 357 Chestnut St., East Longmeadow, Massachusetts 01028. This warranty explicitly excludes normal wear and tear on the filter or Pre-Filter, as well as faulty installation, accident, misuse, or vandalism.
2. Any implied warranties of merchantability or fitness for a particular purpose are hereby limited to the duration of the express written warranty contained herein. There are no other warranties and remedies except as contained herein. This warranty shall inure to the benefit of the owners, Successors and Assigns.

In the event of a breach of the warranty described above, the owner may notify the Manufacturer by telephone or in writing of the defect and, within a reasonable time, the Manufacturer shall send a suitable replacement part to remedy said defect, and the owner shall be charged for said part at the current price level. The owner may return the defective part to the Manufacturer, postage prepaid by the owner, along with the serial number of the defective product and the Manufacturer will then issue to the owner a full credit for the repair part, including outgoing postage to a Continental U.S. destination.

